

Pre-insulated Terminals

Butt & Parallel Splices

Material: Copper


Insulation: Polyvinyl Chloride

RoHS compliant



Max. elec. rating: ■ 19 amp
■ 27 amp
■ 48 amp

600 volts 75°C



Butt

Wire Range mm ² (AWG)	Part No.	Dimensions mm		
		D1	D2	L
0.5-1.5 (22 - 16)	15BSL	1.8	4.3	24.5
1.5-2.5 (16 - 14)	25BSL	2.3	4.8	24.5
4-6 (12 - 10)	6BSL	3.5	6.6	26.0

Pack Quantity: 100

Vibration resistant versions available on request.

Parallel

Wire Range mm ² (AWG)	Part No.	Dimensions mm		
		D1	D2	L
0.25-1.65 (22 - 16)	15PSL	1.7	3.3	16.0
1.04-2.63 (16 - 14)	25PSL	2.3	4.0	16.0
4-6 (12 - 10)	6PSL	3.4	5.5	20.5

Pack Quantity: 100

Piggy Back - Push On

Material: Brass - Tin Plated

Insulation: Polyvinyl Chloride

RoHS compliant




Max. elec. rating: ■ 10 amp
■ 15 amp
■ 24 amp

300 volts 75°C



Wire Range mm ² (AWG)	Part No.	Dimensions mm									Tab Size
		D1	D2	D3	D4	L	L1	L2	H		
0.5-1.5 (22 - 16)	63RPIG	1.8	6.6	8.0	4.3	20.0	10.0	7.5	5.5		6.3 x 0.8
1.5-2.5 (16 - 14)	63BPIG	2.3	6.6	8.0	4.8	20.0	10.0	7.5	5.5		6.3 x 0.8
4-6 (12 - 10)	63YPIG	3.5	6.6	8.0	6.5	24.0	13.5	7.5	6.5		6.3 x 0.8

Pack Quantity: 100

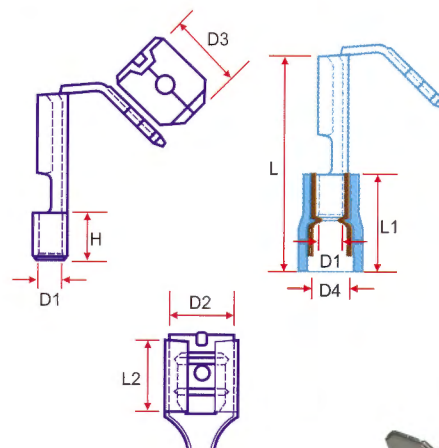

Un-insulated Piggy Back
Terminals available on
request.

