


# Crescent

- High specification fully enclosed linear luminaire suitable for most commercial and educational applications
- Steel powder coated body for enhanced durability
- Polycarbonate diffuser and polished louvre for excellent photometric performance
- CCT selectable between 3000K and 4000K and power selectable; offering a choice of 2 outputs, in one luminaire
- Suitable for surface mounting and suspension
- Powered by Philips



425

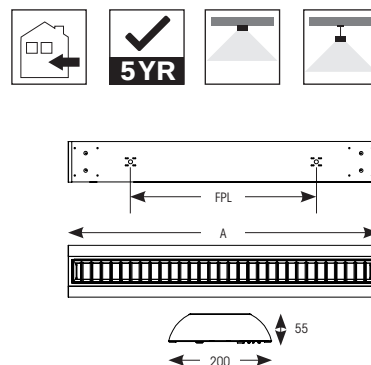

Powered by CASAMBI



| INPUT    | HERTZ   | TEMP          | LIFETIME (HRS) | CRI | SDCM | BEAM ANGLE | CLASS | IP   |
|----------|---------|---------------|----------------|-----|------|------------|-------|------|
| 220/240V | 50/60Hz | -20°C to 50°C | L70 54,000     | 80  | 3    | 80°        | 1     | IP20 |

| CODE      | DESCRIPTION               | WATTAGE   | CCT         | LUMENS              | LM/W                | UGR | A      | FPL   |
|-----------|---------------------------|-----------|-------------|---------------------|---------------------|-----|--------|-------|
| ACRESLED4 | 1 x 1200 - CCT Selectable | 21-35W    | 3000K/4000K | 3100-4900lm (4000K) | 146-139lm/W (4000K) | 18  | 1200mm | 600mm |
| ACRESLED5 | 1 x 1500 - CCT Selectable | 34W - 40W |             | 4900-5600lm (4000K) | 143-139lm/W (4000K) |     | 1500mm | 900mm |

\*UGR Value based on (4H - 8H)

| CODE (OPTIONS) | DESCRIPTION         |
|----------------|---------------------|
| /M3            | Emergency           |
| /SM3           | Self-Test Emergency |
| /DM3           | DALI Emergency      |

| CODE (OPTIONS) | DESCRIPTION                   |
|----------------|-------------------------------|
| /OCTO          | OCTO Smart Control            |
| /DD            | Digital Dimming (DD1/DD3/DD4) |

| CODE (ACCESSORIES) | DESCRIPTION         |
|--------------------|---------------------|
| ASK1               | Suspension Kit 1.3m |

