

Defender LED IP65 Clean Air Recessed Modular

Supplied c/w Integral Driver

486




Powered by
TRIDONIC
▼enlightening your ideas




- Sealed LED luminaire to endure arduous environments
- High quality steel housing with welded frame and secured by Easy Fix style brackets
- Frame fitted with TP(a) rated diffuser providing excellent diffusion and outstanding light transmission
- Suitable for areas such as laboratories, hospitals, clean rooms, kitchens and showers
- LED lifespan L70 56,000 hours



Easy Fix style bracket



115mm depth

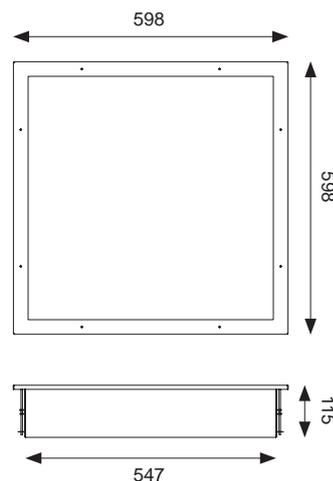

LED Information

Total (Watts)	49W
Lumens Delivered	4660lm
Lm/W	95lm
CRI	Ra 80
CCT	4000K
Input	230V
Hertz	50/60Hz
Operating Temp	-20°C to 50°C

Code	Lamp	Description
ADELED	LED	49W - Cool White
Options	/M3	Emergency
	/DD	Digital Dimming (DD1/DD2/DD3/DD4)

