

1 Luminaire data

1.1 Ansell Lighting, EndLED Lithium Exit Sign (AENLED/LI/3M/ST/B)

1.1.1 Data sheet

Manufacturer: Ansell Lighting

AENLED/LI/3M/ST/B EndLED Lithium Exit Sign


Luminaire data

Luminaire efficiency : 100%
Luminaire efficacy : 15 lm/W
Classification : A40 ↓100.0% ↑0.0%
CIE Flux Codes : 43 75 94 100 100
UGR 4H 8H : <10.0 / 11.3
Power : 1 W
Luminous flux : 15 lm

Dimensions : 300 mm x 150 mm x 33 mm


Equipped with

Quantity : 1
Designation :
Colour :
Luminous flux : 15 lm

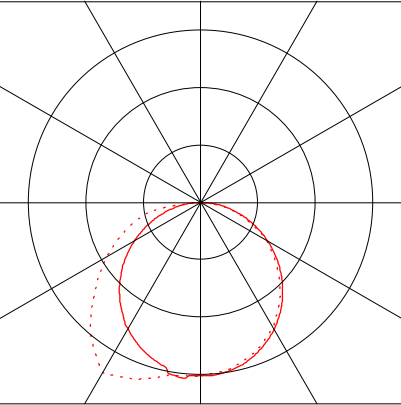

1.1 Ansell Lighting, EndLED Lithium Exit Sign (AENLED/LI/3M/ST/B)

1.1.2 LDC

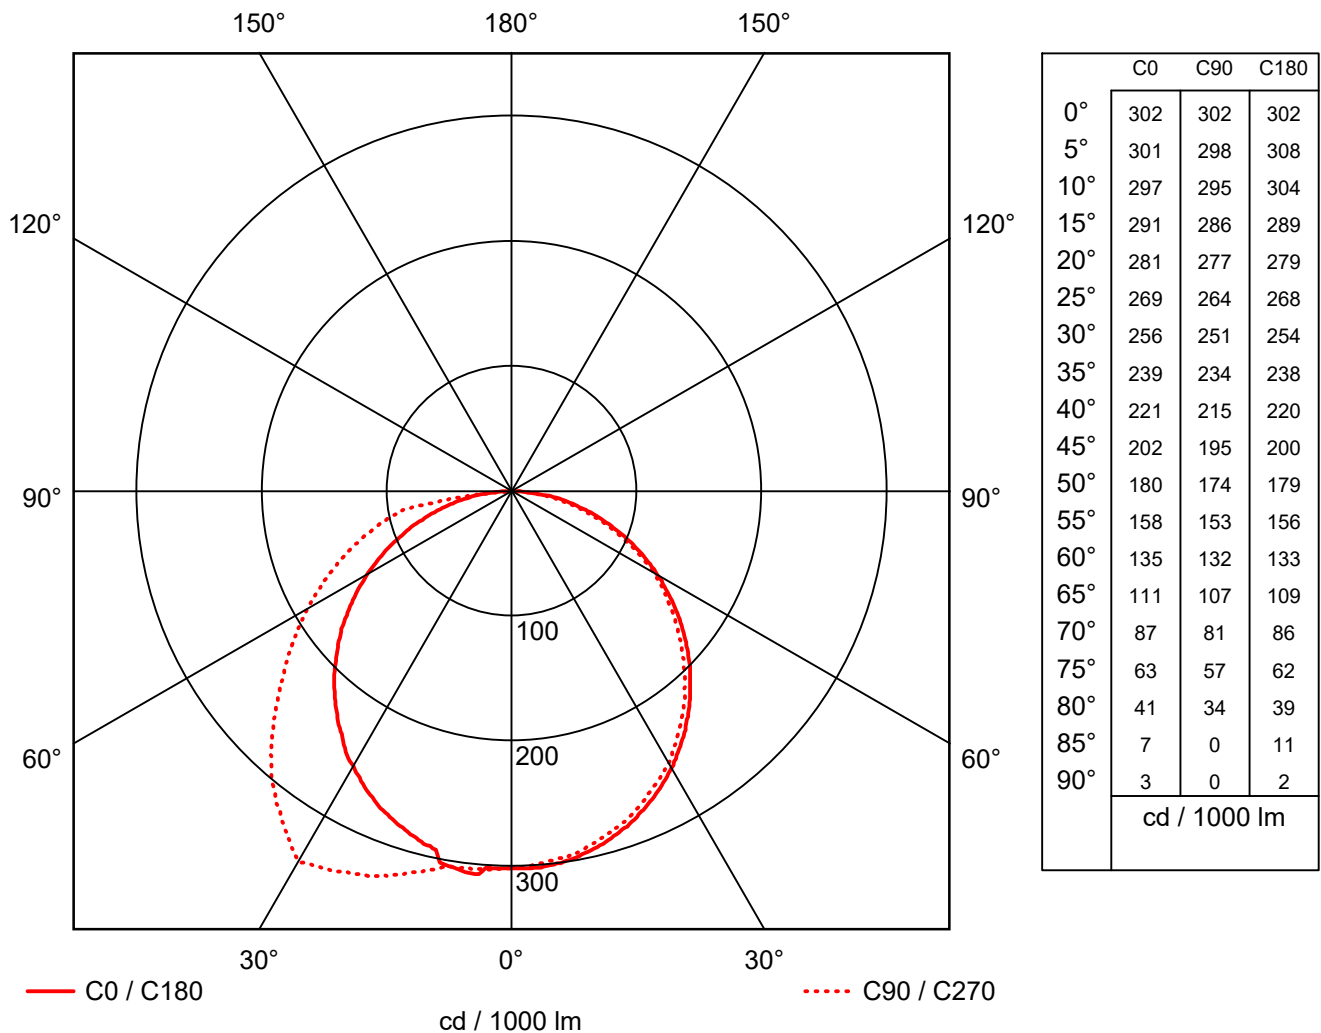

Manufacturer : Ansell Lighting
 Order number : AENLED/LI/3M/ST/B
 Luminaire name : EndLED Lithium Exit Sign
 Equipment : 1 x 1 W / 15 lm
 Dimensions : L 300 mm x W 150 mm x H 33 mm
 File name : rlx_20210406155437.ldt

Efficiency factor : 100%
 Luminaire efficacy : 15 lm/W(A40)
 Light distribution :
 Beam Angle : 52.0° C0
 50.7° C90
 51.8° C180
 63.4° C270