


# Endurance UGR<19 1200x600



- Edge lit LED panel suitable for education, commercial and ancillary area applications
- UGR<19 (unified glare rating) compliant luminaire assisting to eliminate glare for visual comfort
- Cool white, warm white and daylight options
- White anodised aluminium frame for visual compatibility with ceiling grid
- Surface mounting frame option
- TPa as standard
- **Switch Dim, DALI and 0-10V dimming capability using the multi dimmable driver accessories ADDIM/60/MC (see p199 for more information)**
- **Self-Test Panel Pod and Sensor Pod compatible (see p454 for more information)**

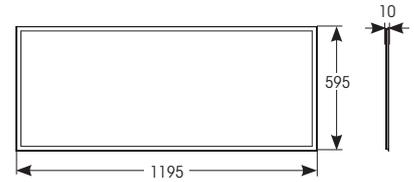

Powered by  
**CASAMBI**



AIRMLED/POD/3NM/ST  
Emergency Pod fitted

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
220/240V	50/60Hz	-20°C to 40°C	L80 50,000	80	6	80°	2	IP20

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	UGR
<b>AERMLED3/120/CW</b>	1200x600 - Cool White	60W	4000K	5800lm	97lm/W	17

\* For Warm White variant replace 'CW' with 'WW', and for Daylight product replace 'CW' with 'DL' into the above codes e.g. **AERMLED3/120/WW**

<b>AIRMLED/POD/3NM/ST</b>	Emergency Pod	5W
<b>AIRMLED/POD/MWS</b>	Sensor Pod	1W

\* UGR Value based on (4H - 8H)

CODE (OPTIONS)	DESCRIPTION
<b>/WW</b>	Warm White Versions
<b>/DL</b>	Daylight Versions
<b>/OCTO</b>	OCTO Smart Control

CODE (ACCESSORIES)	DESCRIPTION
<b>ASMF120/1</b>	1200x600 Surface Mounting Frame
<b>APRK/120</b>	1200x600 Plasterboard Recessed Kit
<b>ADDIM/60/MC</b>	60W Multi-current Dimmable LED Driver