


# Harrier LED IP65 Blade Exit Sign

Supplied c/w Self-Adhesive Legend (Optional Blade Legend ordered separately)



513

- Compact high performance IP65 polycarbonate surface emergency luminaire
- Self-test as standard
- Optional hanging blade legends (supplied with self-adhesive legend as standard) for enhanced appearance
- Aesthetically designed for modern appearance
- 20mm side and rear cable entries
- High output LED performance and distribution allows maximum spacing providing reduced cost
- Viewing distance 25 metres

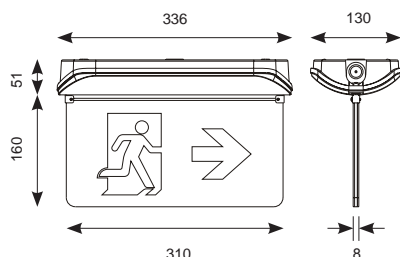

- \* 1 lux minimum must be used for all marked emergency escape routes, to be measured down the centre line of the escape route itself
- \*\* 0.5 lux minimum must be used for areas larger than 60m<sup>2</sup>, the maximum value is to be measured across the area excluding 0.5 metre border around the edge of the room
- \*\*\* Explanation of the symbols:-  
**Transverse - Wall**  
 Distance to wall from side of fitting  
**Transverse - Transverse**  
 Side to side spacing  
**Axial - Wall**  
 Distance to wall from end of fitting  
**Axial - Axial**  
 End to end spacing

## LED Information

Total (W)	5W
Lumens Delivered	
Emergency Mode	142lm
Standard Mode	299lm
CCT	6500K
Input	230V
Hertz	50/60Hz
Operating Temp	0C° to 40C°



	Code	Lamp	Description
<b>Self-Test</b>	<b>AHARLED/3M/ST</b>	LED	5W Maintained/Non-Maintained
<b>Legends</b>	<b>AHARLED/ALAR</b>		Harrier LED Double Sided Legend - Arrow Left and Right
	<b>AHARLED/L/AD</b>		Harrier LED Double Sided Legend - Arrow Down
	<b>AHARLED/L/AU</b>		Harrier LED Double Sided Legend - Arrow Up
<b>Battery</b>	<b>ASBP/5</b>		7.2V 1500mAh Ni-Cd Replacement Battery



Warrington: +44 (0) 1942 433333  
 Belfast: +44 (0) 2890 773750

