

Leo CCT LED Polycarbonate Bollard

Supplied c/w Integral Driver



Powered by
TRIDONIC
enlightening your ideas

- Modern styled bollard with polycarbonate construction
- White reflector with clear polycarbonate diffuser
- Polycarbonate construction is ideal for coastal applications
- Suitable for domestic and commercial applications
- Supplied c/w root mounting kit, can be surface mounted with rawbolts
- CCT selectable between 3000K and 4000K
- LED lifespan L70 61,000 hours
- Non-dimmable




ALEOLED/CCT/045/GR



ALEOLED/CCT/075/GR



ALEOLED/CCT/100/GR

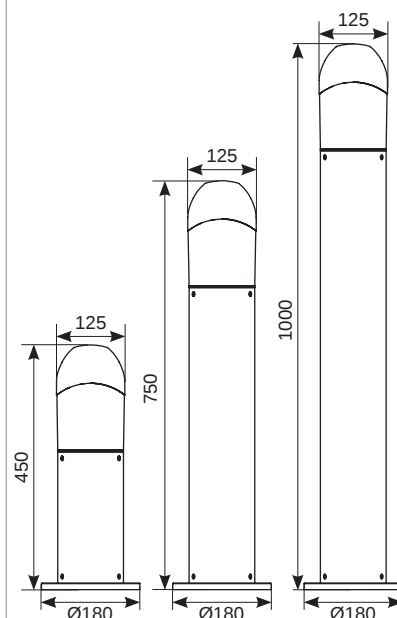

LED Information

Total (Watts)	8W	
	13W	
	13W	
Lumens Delivered	4000K	3000K
8W	592lm	533lm
13W	922lm	880lm
13W	922lm	880lm
Lm/W		
8W	74lm	67lm
13W	77lm	73lm
13W	77lm	73lm
CRI	Ra 80	
CCT	3000K	
	4000K	
Input	230V	
Hertz	50/60Hz	
Operating Temp	-10°C to 40°C	

Code	Lamp	Description
ALEOLED/CCT/045/GR	LED	8W - Warm White/Cool White 450mm
ALEOLED/CCT/075/GR	LED	13W - Warm White/Cool White 750mm
ALEOLED/CCT/100/GR	LED	13W - Warm White/Cool White 1000mm