


Mattone LED Uni-Bricklight CCT

Supplied c/w Integral Driver



- Universal polycarbonate LED bricklight
- Unique adjustable feet allows for installation into multiple brick apertures
- Polycarbonate construction ideal for coastal applications
- Push fit loop-in loop-out terminals for ease of installation
- Pre-wired with 600mm of rubber insulated cable
- Supplied c/w installation housing for additional protection and ease of installation
- CCT selectable between 3000K and 4000K
- Non-dimmable

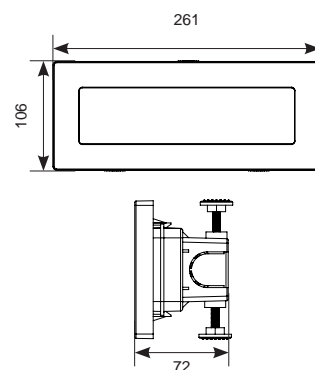

LED Information

Total (Watts)	2W
Lumens Delivered	
Cool White	101lm
Warm White	85lm
Lm/W	
Cool White	51lm
Warm White	43lm
Beam Angle	105°
CRI	Ra 80
CCT	4000K 3000K
Input	230V
Hertz	50Hz
Operating Temp	-10°C to 40°C

Code	Lamp	Description
AMATBLED	LED	2W - Cool White/Warm White

