

**NATIONAL
VENTILATION**

Manufacturers & suppliers
of  monsoon products

Monsoon Zone 1 Silence Range




- Improved performance - Can be installed with longer duct runs
- Quieter than ever - as low as 22dB(A)
- Easier to install - Easier wiring and handy spirit level
- Comes with our highest ever warranty - 5 years

Call now to find out more: 01823 690 290

www.nationalventilation.co.uk Email: info@nvagroup.co.uk

CODE	DESCRIPTION
MONS100SA	100mm Standard Model 97m ³ /h
MONS100TA	100mm Timer Model adjustable from 2-30 minutes 97m ³ /h
MONS100HTA	100mm Timer/Humidistat/Pullcord Model adjustable from 60-90% 97m ³ /h
MONS100PCA	100mm Pull Cord Model 97m ³ /h
MONS100PIRA	100mm Passive Infrared Model c/w Timer 97m ³ /h
MONDMEVWK	100mm Window Kit 97m ³ /h
MONSCHR	100mm Chrome Facia (not compatible with MON-S100PIR)
MONS125SA	125mm Standard Model 185m ³ /h
MONS125TA	125mm Timer Model adjustable from 2-30 minutes 185m ³ /h
MONS125HTA	125mm Timer/Humidistat/Pullcord Model adjustable from 60-90% 185m ³ /h
MONS150SA	150mm Standard Model 370m ³ /h
MONS150TA	150mm Timer Model adjustable from 2-30 minutes 370m ³ /h
MONS150HTA	150mm Timer/Humidistat/Pullcord Model adjustable from 60-90% 370m ³ /h

The Monsoon Silence range is the latest innovative domestic ventilation solution, providing high extraction rates with low energy use and exceptionally quiet running levels. The fan comes with a long life ball bearing motor and a silent back draft shutter preventing air travelling back up the duct and into the room. The casing and impeller are made of durable high quality UV-resistant plastic, which helps to prevent degradation and discolouration of the plastic over time. The Mon-S100, S100T, S100HT and S100PC are also now available in a chrome finish, making this stylish fan match well with any modern interior.

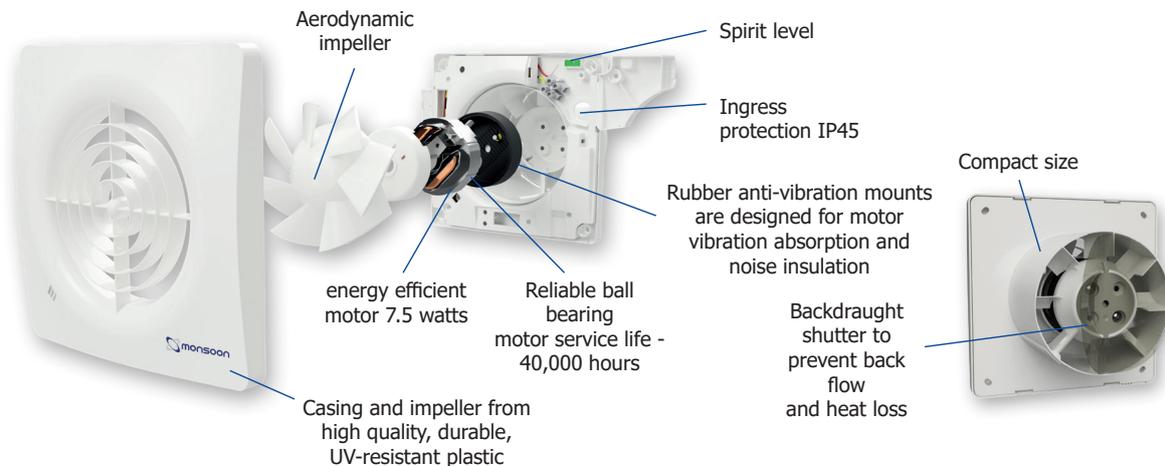



Call now to find out more: 01823 690 290

www.nationalventilation.co.uk Email: info@nvagroup.co.uk


Technical data

	MON-S100		MON-S125		MON-S150	
	High	Low	High	Low	High	Low
Speed	High	Low	High	Low	High	Low
Volts at 50 Hz (V)	230	230	230	230	230	230
Power (W)	7.5	5	14	10.5	19	9
Specific Fan Power (W/l/s)	0.33	0.25	0.29	0.27	0.21	0.24
Current (A)	0.051	0.049	0.083	0.067	0.094	0.07
Performance (l/s)	27	20	48	38	89	37
Sound @ 3m dB(A)	25	22	38	29	41	32
Weight (Kg)	0.55	0.55	0.99	0.99	1.80	1.80
IP rating	IP45	IP45	IP45	IP45	IP45	IP45

Performance Comparison

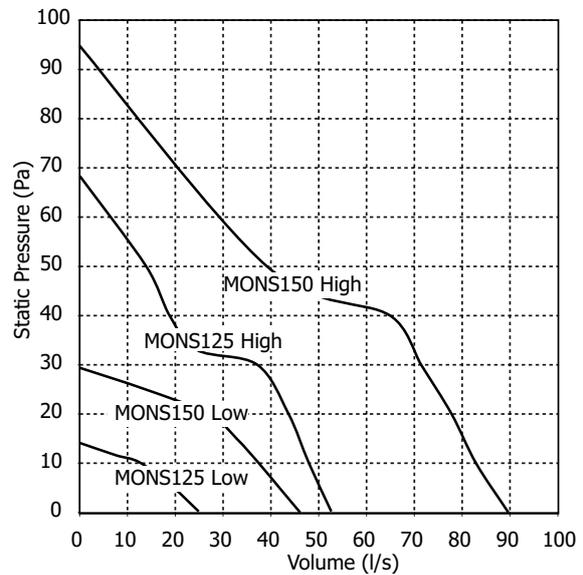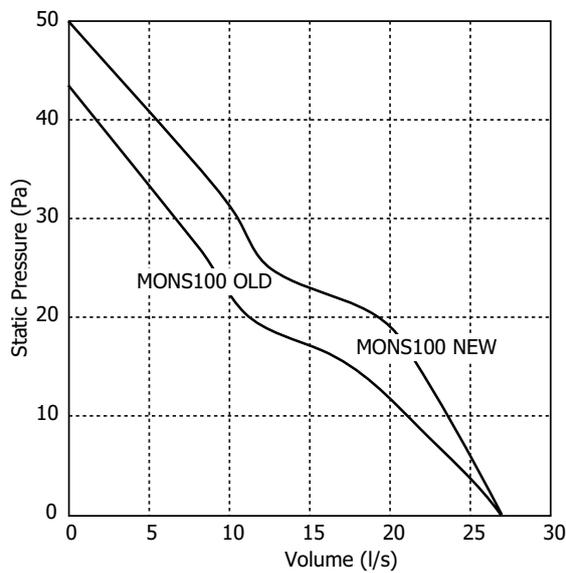

Dimensions

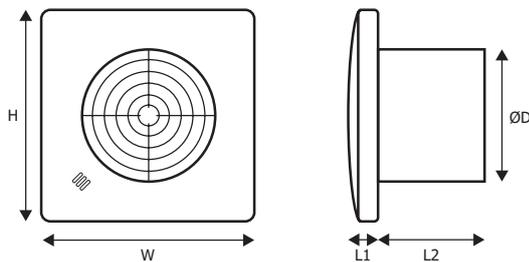

MODEL	H	W	L1	L2	ØD
MON-S100	160	160	22	80	99
MON-S125	185	185	29	100	120
MON-S150	227	227	30.5	111	146

Call now to find out more: 01823 690 290

www.nationalventilation.co.uk Email: info@nvagroup.co.uk